


Safeguard lever for TW couplings

■ For decades, tank truck couplings according to DIN 28450 standard (EN 14420-6) have been in wide use for the transfer of dan-

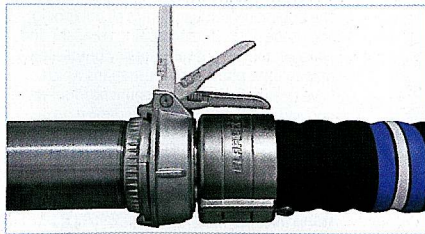

Inadvertent lifting of the lever during operation is avoided.

gerous goods. Male and female coupler are interlocked after the lever is put down. If the lever is lifted accidentally, the coupling lock is not in function anymore. To avoid

the possibility of loosening the coupling e.g. due to pulsation or vibration of the refuelling system,

Elaflex developed the „Active Safeguard Lever“. After clamping the lever down, it is automatically fixed. Inadvertent lifting of the lever during operation is definitely avoided. To open the coupling a slider has to be pushed (one-handed action). The patented system is available as of February 2007 in sizes 3" and 4".

The couplings are fully compatible to other fittings according to EN 14420-6 standard.

further information at www.PuA24.net

more @ click

PA047924